




Drive Over Foam Unit

For passenger and cargo vehicles

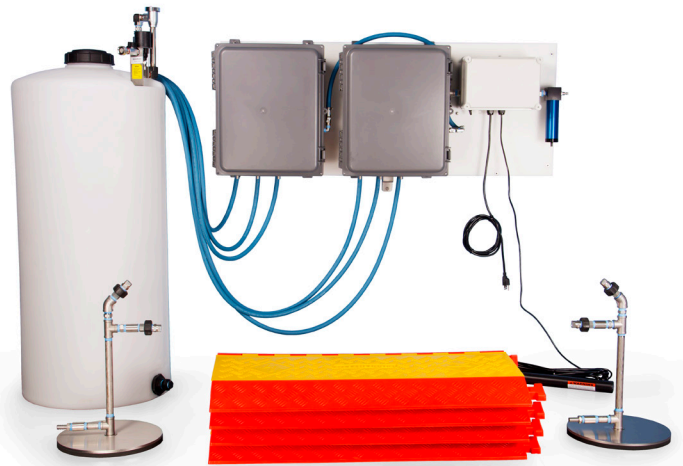

FEATURES:

- Applies foaming product to vehicle underbody
- Works with trucks and passenger vehicles
- Foam provides long contact times for maximum effectiveness
- Sensor-operated system activates when vehicle approaches - no attendant needed
- Easy to install

SPECIFICATIONS:

- Air Requirements: 50 psi (3.4 bar) with 20 cfm (566.3 l/min)
- Water Requirements: minimum 25 psi (1.7 bar)
- Vehicle Ground Clearance: 7 - 49 in. (17.8 - 124.5 cm)
- Vehicle Weight: Up to 40,000 pounds (18.14 metric tons) per axle

Item Number: FHDOF

