


# Central Doorway Foam Station (24VAC)

GK2T-24VAC

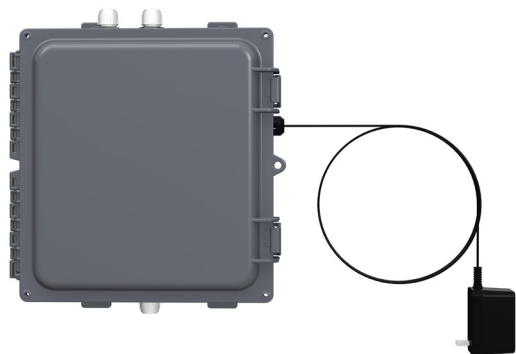

## Features

- One central pump distributes pre-mixed solution through header system
- Pump and doorway nozzles sold separately
- Up to 25 ft. (7.6 m) total distance between control box and nozzle
- Powered by air and electricity - 24 VAC
- Repeat cycle timer

## Industries

- Food and beverage
- Manufacturing



*how to buy*

## The Good Stuff

- **Secure central chemical location**  
Keep chemistry secure, away from the production floor; no need to refill containers, chemistry given on demand
- **No refills**  
One location to titrate consistent chemical
- **On schedule chemical delivery**  
Repeat cycle timers at each station (adjustable via traffic flow) set delays to ensure coverage

## Specifications

- Power type .....compressed air and electricity
- Chemical pickup type.....pre-mixed solution
- Number of products unit can draw from .....one product
- Output volume .....approximately 15 gal/min (56 l/min)
- Flow rate.....2 gal/min (7.6 l/min)
- Pump seals.....Santoprene, Viton, or Kalrez
- Timer operation type.....repeat cycle
- Coverage area ..... 5 ft. wide by 9 ft. long (1.5 m wide by 2.7 m long)
- Nozzle type .....single-line poly nozzle assembly (NZA-DS-SL)  
(sold separately)
- Number of nozzles .....one control box can support  
up to 2 nozzle assemblies
- Distance from nozzles to control box.....the combined distance  
between the control box and nozzle(s)  
must equal 25 ft. (7.6 m) or less
- Tubing/fitting sizes.....designed for use with 1/2 in. (12.7 mm)  
outside diameter tubing between  
control box and nozzle(s)

## Requirements

- Compressed air requirements ..... 40-80 psi (2.8-5.5 bar) with  
3.5-8 cfm (99.1-226.5 l/min)
- Liquid temperature range .....40-100 ° F (4.4-37.8 ° C)
- Electrical requirements ..... 120 VAC at 60 Hz, 2 amps  
(GFCI protected outlet)
- Operating voltage ..... 24 VAC  
(included adapter converts 120VAC to 24 VAC)
- Central system requirements.....pre-mixed solution must be  
supplied by a properly sized header system  
at 2 gpm and 40-80 psi (2.8-5.5 bar)
- Chemical compatibility .....chemical products  
used with this equipment must be formulated for this type of  
application and compatible with unit materials and pump seals. For  
more information on chemical compatibility, consult the manufacturer  
or SDS for your product or contact our customer service department.



800 567 5420 | sales@foamit.com